


Monobolt® 2761



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Countersunk head	Tête fraisée	Senkkopf	Testa svasata	Cabeza avellanada
Body: steel	Corps: Acier	Hülse: Stahl	Corpo: Acciaio	Cuerpo: Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar passiviert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente
Stem: carbon boron steel	Tige: Acier	Dorn: Stahl	Gambo: Acciaio	Vástago: Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

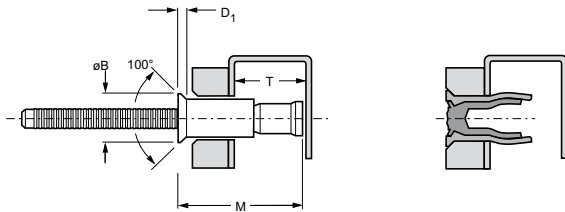

ø	[Cross-section diagram]		[Thread diagram]		M	ø B	D ₁	T	[Torque diagram]	[Strength diagram]	Part No/ref
	min.	max.	min.	max.							
4.8 (3/16")	3.17	8.41	4.9	5.1	20.0	8.3	2.2	10.5	6.4	5.1	02761-00615
	3.17	12.22			26.3			13.5			02761-00619
6.4 (1/4")	3.17	12.07	6.6	7.0	26.4	10.1	2.4	12.2	11.7	10.4	02761-00821

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas